

INSTALLATION MANUAL

valor® G3 739CLK

739CLK Classic Log Kit—for G3 739M


Description

The 739CLK Classic Log kit installs in Valor G3 739M fireplaces.

Material Required

- Classic Log Kit, which contains:
 - 6 logs
- Gloves, if desired, not included

Kit Content

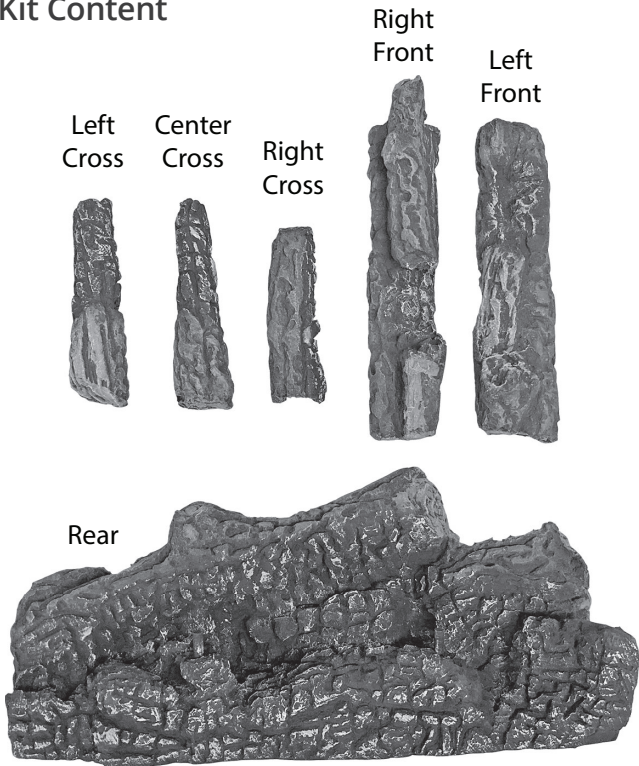


Installation

Carefully unpack the kit. Some logs have pegs to help you place them on other logs.

Adjust Fuel Bed Support Bracket

Loosen the three screws holding down the fuel bed support and slide the support bracket all the way forward as shown. Tighten the screws back down.

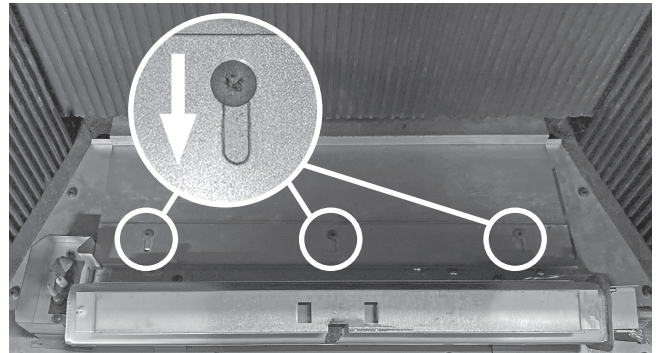


Logs

1. Place the Rear log on the fuel bed support as shown.




Item	Part Number
Rear Log	4001697
Left Hand Cross Log	4001772
Center Cross Log	4001698
Right Hand Cross Log	4001701
Front Right Log	4001700
Front Left Log	4001699


- Place the Left Front log onto the burner as shown, making sure the groove in the log fits onto the raised rail on the burner.

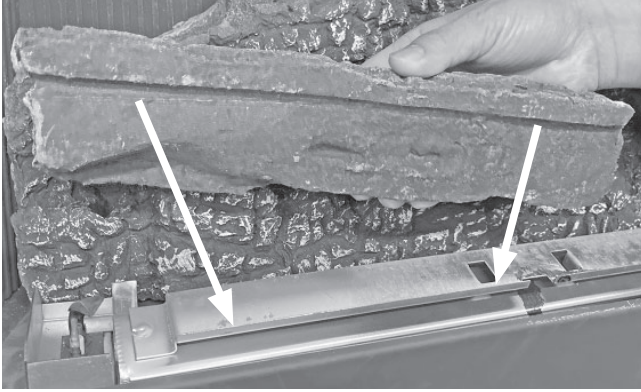


- Place the Right Front log onto the burner as shown, making sure the groove in the log fits onto the raised rail on the burner.

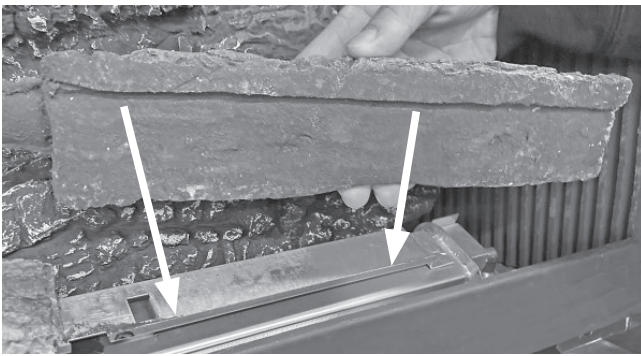


- Place the Right Cross log from the Right Front log onto the Rear log. Note the pin on the Rear log that fits into the hole on the Right Cross log.

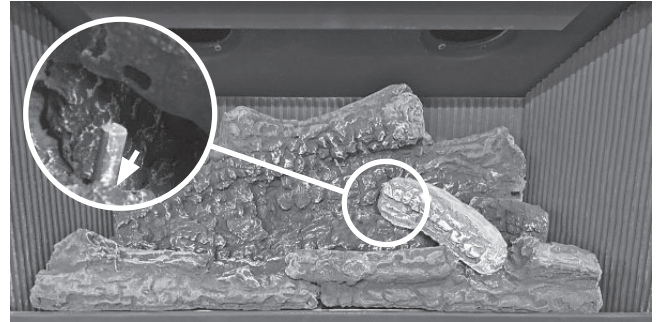

- Place the Middle Cross log from the Left Front log to the Rear log.

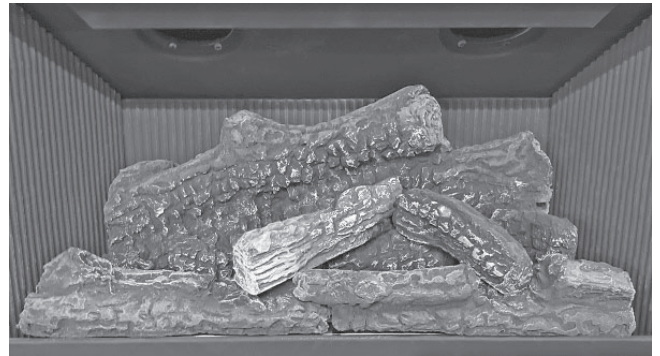

- Place the Left Cross log from the Left Front log onto the Rear log. Note the pin on the Rear log that fits into the hole on the Left Cross log.

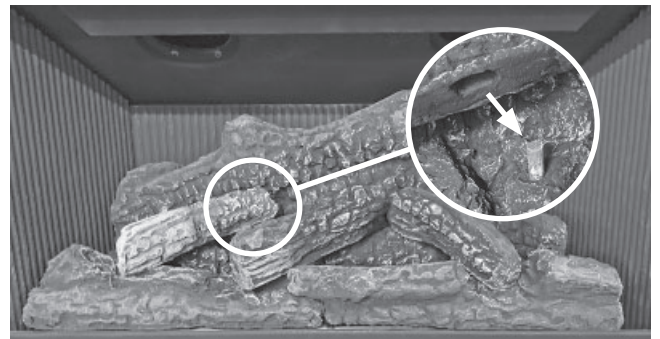

739CLK installed



valor® G3 739CLK

739CLK Bûches classiques—G3 739M


Description

L'ensemble Bûches classiques 739CLK peut être installé dans les foyers Valor G3 739M.

Pièces requises

- Ensemble Bûches classiques, contenant :
 - 6 bûches
- Gants, si désirés, non inclus

Contenu

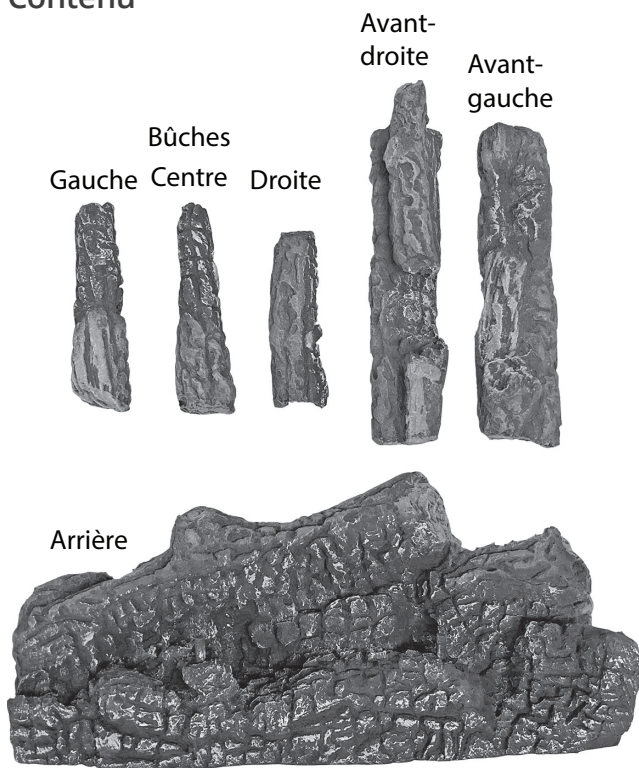


Installation

Déballer l'ensemble avec soins. Certaines bûches ont une cheville ou un trou pour aider à les placer

Ajustez la pièce mobile du support de bûche

Repérez derrière le brûleur le support du lit de combustion. Dévissez les vis retenant la pièce mobile du devant et glissez-la vers l'avant le plus possible. Resserrez les vis.

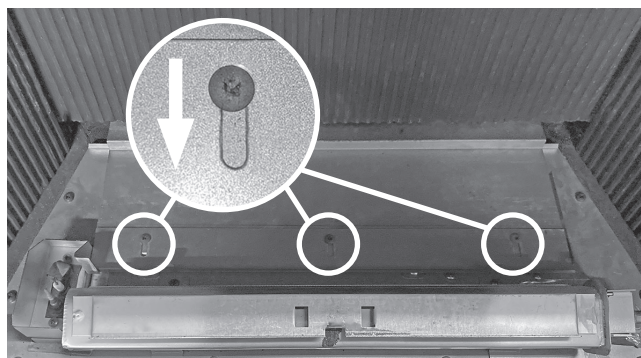


Bûches

1. Placez la bûche arrière sur le support du lit de combustion.




Pièce	N° de pièce
Bûche arrière	4001697
Bûche gauche	4001772
Bûche de centre	4001698
Bûche droite	4001701
Bûche avant-droite	4001700
Bûche avant-gauche	4001699


2. Placez la bûche avant-gauche sur le brûleur insérant la bordure verticale sur le brûleur dans la fente du dessous de la bûche.

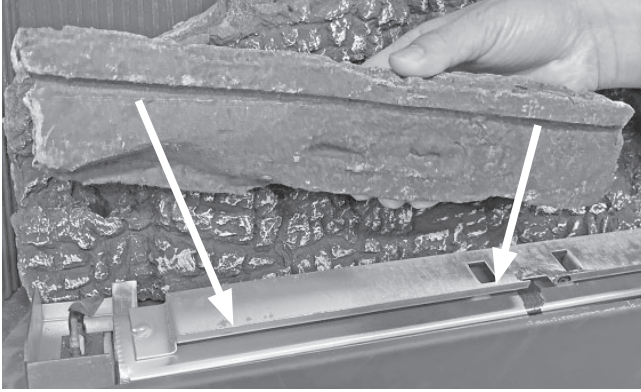

3. Placez la bûche avant-droite sur le brûleur insérant la bordure verticale sur le brûleur dans la fente du dessous de la bûche.

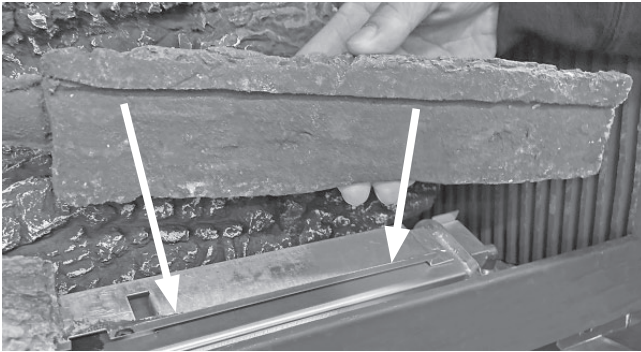


4. Placez la bûche de croisement droite sur la cheville de la bûche arrière et son autre bout dans la cavité sur la bûche avant-droite.

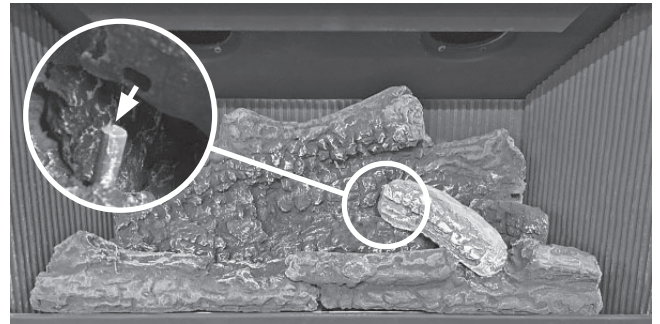

5. Placez la bûche du centre sur la bûche arrière et son autre bout dans la cavité sur la bûche avant-gauche.



6. Placez la bûche gauche sur la cheville de la bûche arrière et son autre bout sur la bûche avant-gauche.

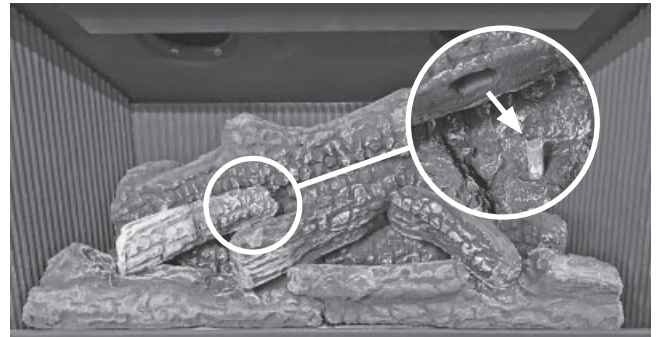

739CLK installé

