

INSTALLATION MANUAL

valor[®] Horizon





Arched Cast Surround 614CVI

Approved for use with Valor models 534 with 610FVI ONLY


The 614CVI Arched Cast Surround is intended to be used on Valor 534 heaters fitted with FenderFire Double Doors 610FVI.

Installation of the 614CVI does not affect clearances, framing dimensions, or other specifications listed in the heater installation manual.

Note: Backing or wall anchors may be required behind wall finish at fixing points to secure cast surround to wall.

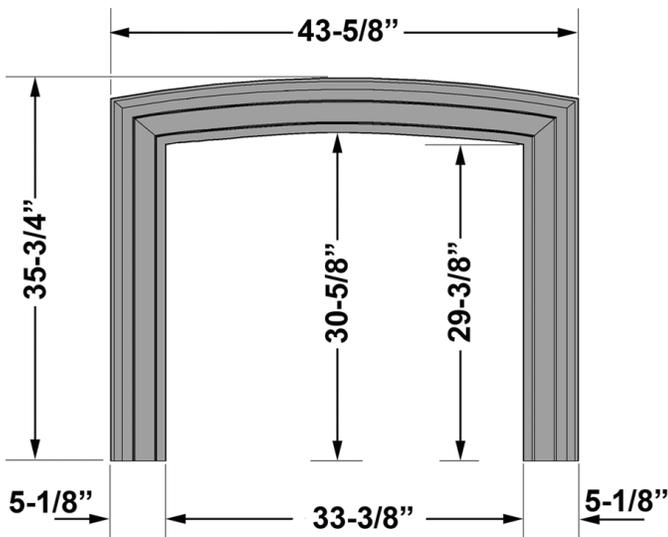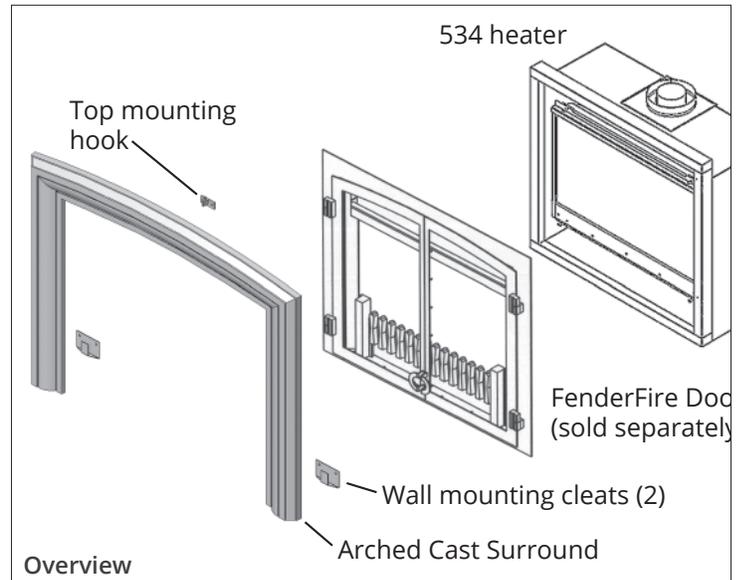


614CVI Arched Cast Surround

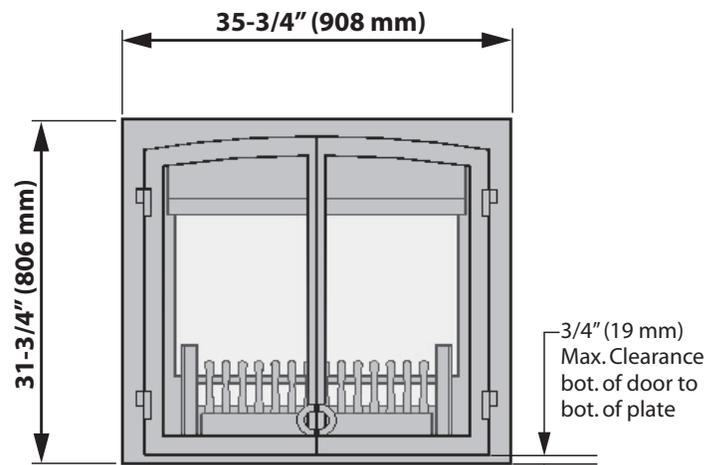


***NOTE:** Bottom of plate is flush with bottom of heater. Install bottom of heater flush with finished hearth.

Door (sold separately)

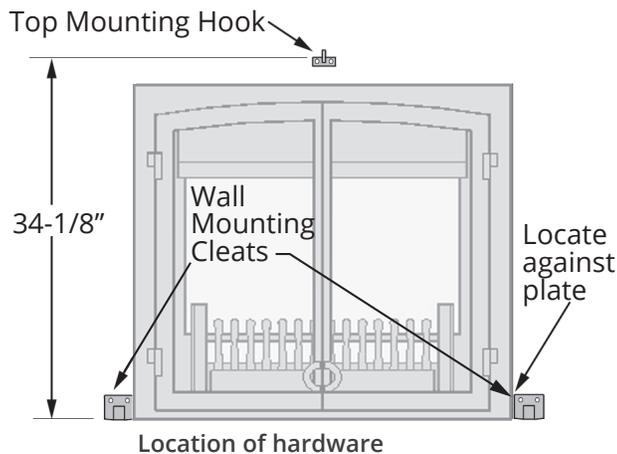


Installation

1. Install heater as per installation instructions. Allow for height of finished hearth.
2. Install the Door kit following instructions packed with kit.
3. Fix 2 mounting cleats (supplied) to the wall, flush with top of finished hearth and adjacent to the backing plate as indicated above.
4. Fix top mounting hook to the wall above the backing plate as indicated above.
5. Align and slide surround legs onto cleats and hook the surround to the top hook against the wall as indicated above.

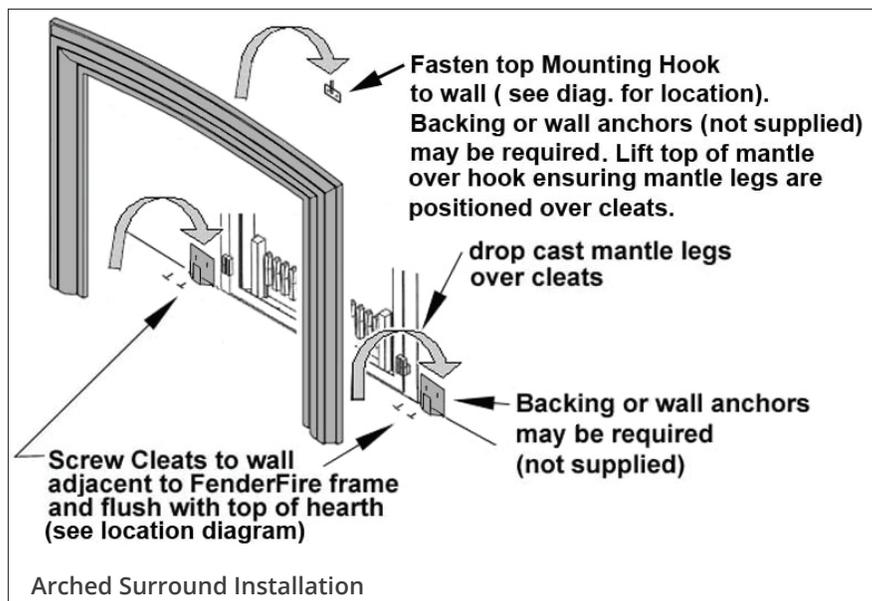

Repair Parts

| | Description | Part Number |
|---|------------------------|-------------|
| 1 | Cast Surround Assembly | 4000716VI |
| 2 | Top Mounting Hook | 4000722 |
| 3 | "J" Cleats | 4000720 |
| | Hardware | 614HWP |

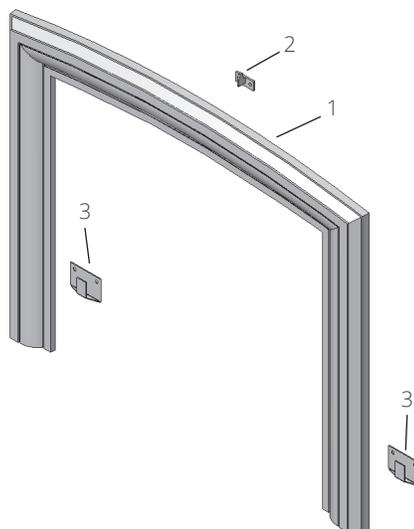

Because our policy is one of constant development and improvement, details may vary slightly from those given in this publication.

Designed and Manufactured by / for Miles Industries Ltd.

190 – 2255 Dollarton Highway, North Vancouver, B.C., CANADA V7H 3B1

Tel. 604-984-3496 Fax 604-984-0246

www.valorfireplaces.com

valor[®] Horizon






Arche de fonte 614CVI


Certifié pour foyers Valor 534 avec Porte FenderFire 610FVI

L'arche de fonte 614CVI est conçue pour être installée avec les foyers Valor 534 munis de la Porte double FenderFire 610FVI.

L'installation de l'arche de fonte 614CVI n'est pas affectée par les dégagements, dimensions d'encadrement ou autres particularités indiquées dans le guide d'installation du foyer.

Note : Des chevilles d'ancrage murales peuvent être nécessaires pour soutenir l'arche de fonte à ses points de fixation au mur.

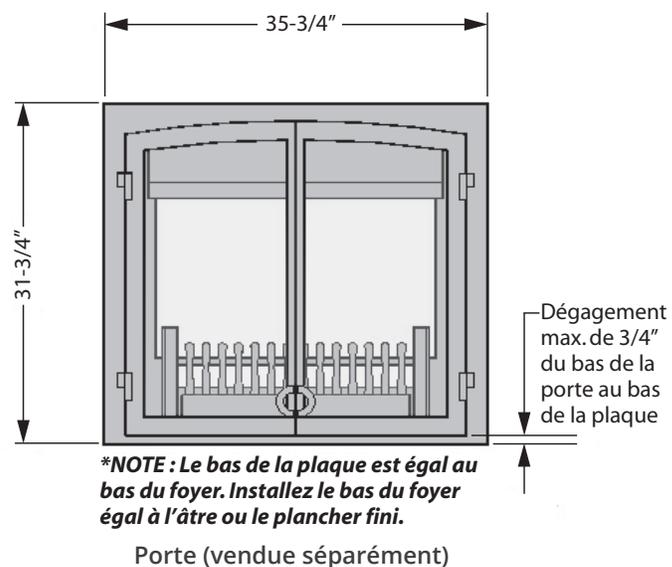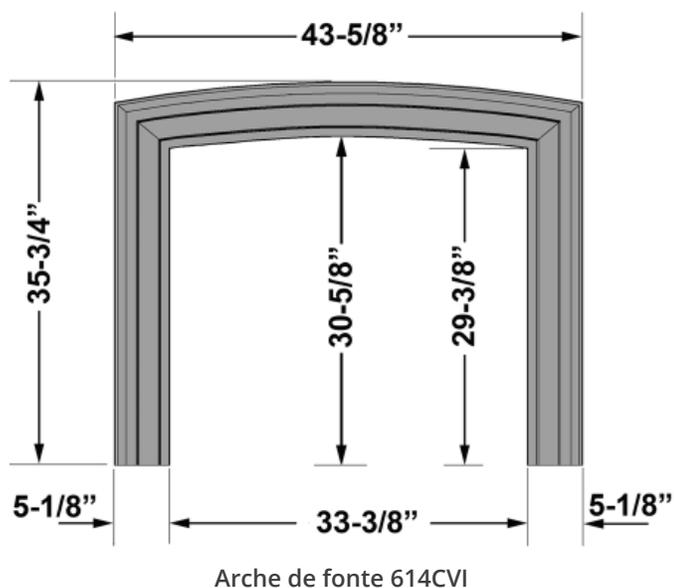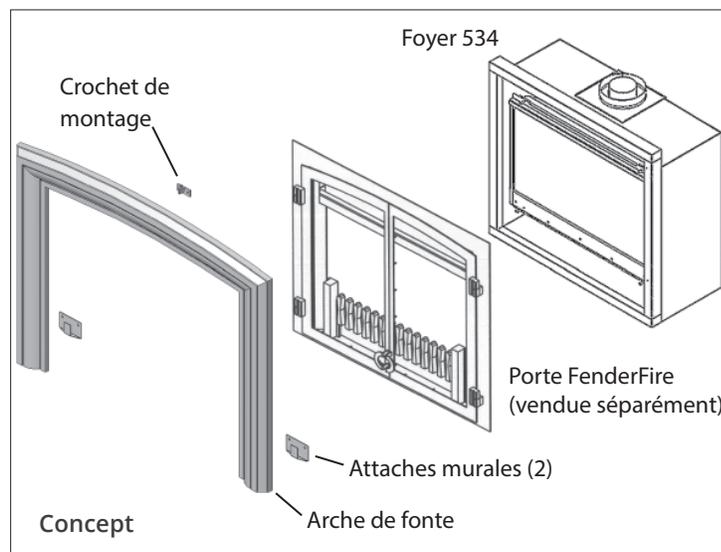


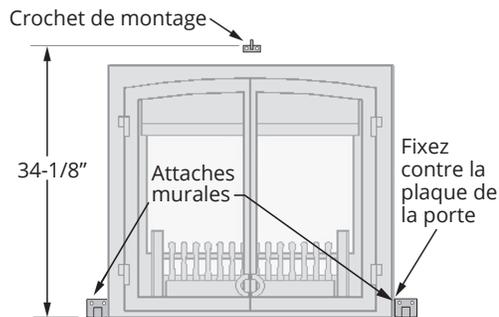

Position du crochet et des attaches

Installation


1. Installez le foyer selon son guide d'installation. Laissez assez d'espace pour la dalle de foyer.
2. Installez les portes selon les directives fournies avec ces kits.
3. Fixez les deux attaches de base au mur immédiatement de chaque côté de la plaque de soutien des portes, égales au dessus de la base de foyer tel qu'indiqué ci-dessus.
4. Fixez le crochet de montage au-dessus de la plaque de soutien.
5. Alignez les pattes de la bordure aux attaches de base et glissez la bordure sur ces attaches tout en l'accrochant sur le crochet de montage, tel qu'indiqué ci-dessus.

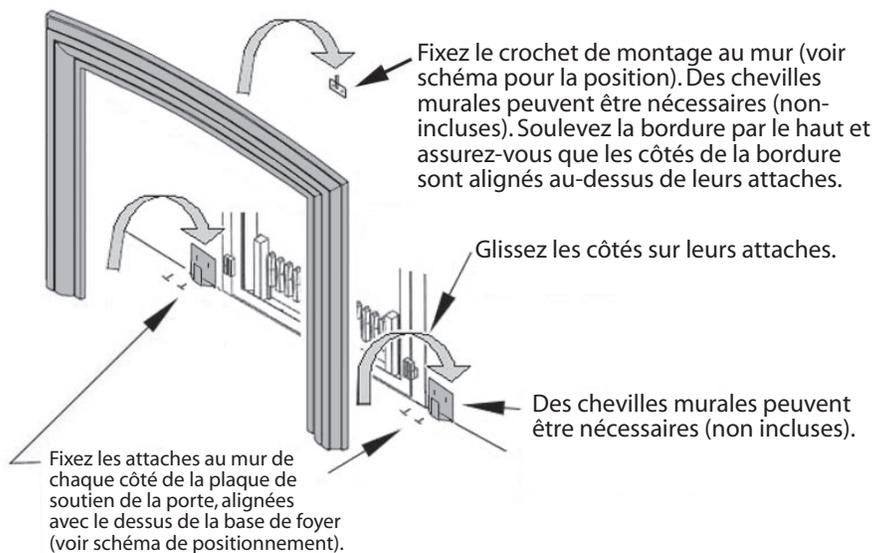

Installation de l'arche

Liste de pièces

| | Description | Pièce n° |
|---|-------------------------|-----------|
| 1 | Bordure de fonte | 4000716VI |
| 2 | Crochet de montage | 4000722 |
| 3 | Attaches murales en "J" | 4000720 |
| | Quincaillerie | 614HWP |

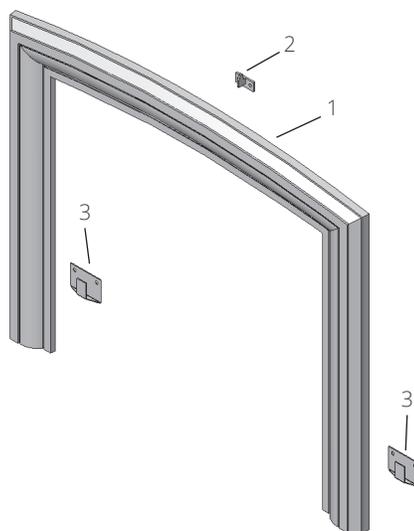

Parce que nous favorisons une politique de développement continu, certains détails de la présente publication peuvent varier.

Conçue et fabriquée par / pour

Miles Industries Ltd.

190 - 2255 Dollarton Highway, North Vancouver, BC, CANADA V7H 3B1

Tél. 604-984-3496 Téléc. 604-984-0246

www.foyervalor.com