

# Valor® P2 200A

February 2024

1/2

## Framing—Stud Framing Dimensions

### NOTE


Use of optional HeatShift System affects framing. See fireplace Installation Manual.

Between underside of header and base of heater. Base of heater must be at finished hearth height. However, **please note that the 240LF Ledgeview 4-sided front extend 1-1/2" [38 mm] below the base of heater.** Increase cavity height and shim appliance accordingly.

1/2" [13 mm] thick non-combustible board required above engine (not supplied). See installation manual.

Combustible framing allowed beneath fireplace. When the appliance is installed directly on carpeting, tile or other combustible material other than wood flooring, the appliance shall be installed on a metal or wood panel extending the full width and depth of the appliance.

A hearth is not required. However, if installing a hearth, consider the following:  
 3-sided backing plates are flush with hearth;  
 4-sided front position 1-1/2" [38 mm] **below** bottom of appliance.  
 Combustible hearth or flooring is allowed if **flush with or below the base of the appliance.**

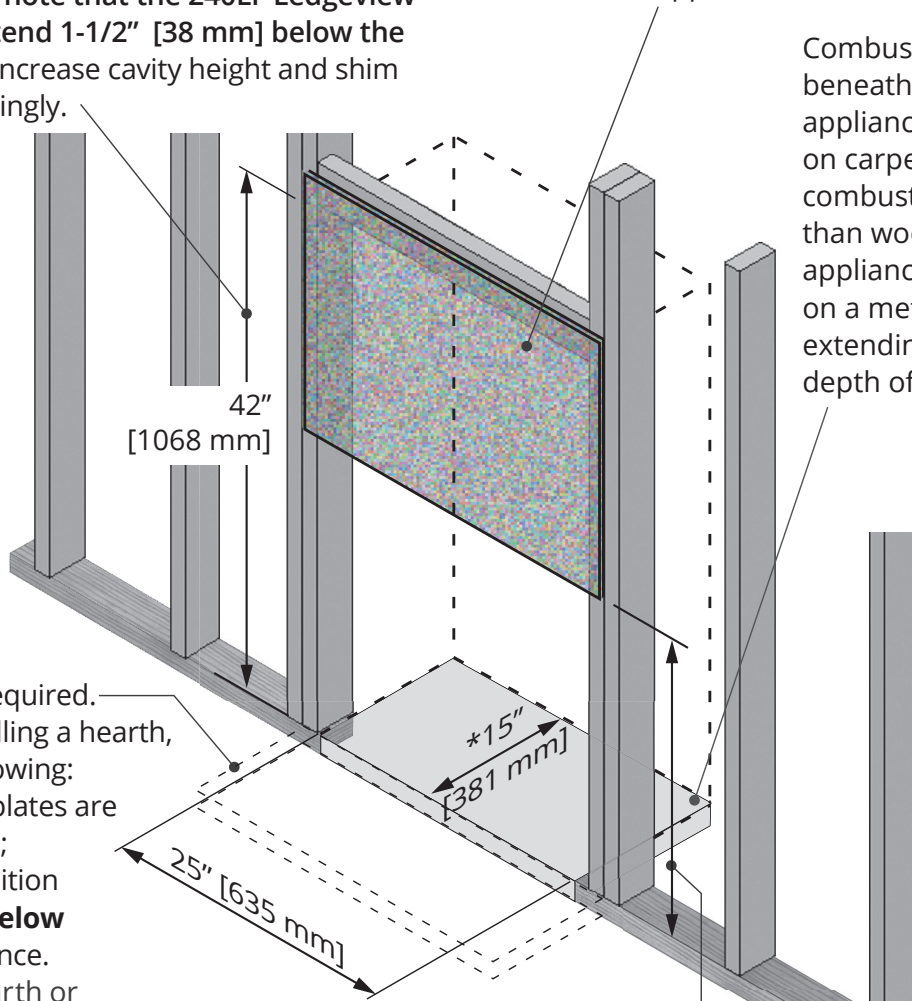

\*Dimension to finished surface of drywall at rear of cavity, if applicable.

25-7/16" [647 mm] between underside of non-combustible board and base of heater. Non-combustible board overlaps top of appliance by 11/16" [18 mm].

# valor P2 200A

February 2024

2/2

## Framing—Built-in Recess, Top Outlet

